CyberPower

RACK ENCLOSURE

CR24U11001KD/CR42U11001KD/CR42U11002
CR42U11003/CR42U11004/CR48U11001/CR48U11002



ROBUST RACKS PROTECT YOUR EQUIPMENT

Robust rack enclosure with optional accessories to organize your IT equipment


Ideal for server room and data center solutions, the standard Rack Enclosure Series protects and supports rackmount IT equipment. The products feature exclusive hex perforated design to enable optimal airflow. The lockable doors and side panels with keyed-alike locks heighten the security. Convenient features include removable doors and side panels, rack U numbering, depth-adjustable mounting rails, rear accessory channels with toolless mounting slots, easy cabling and integrated grounding system. The standard design is compatible with various accessories to customize IT solutions based on different needs.

SERIES FEATURES

- Industry Standard Depth Rack Enclosure
- Adjustable Mounting Depth
- Hexagonal Perforated to Enhance Ventilation Capability
- Doors and Side Panels with Keyed-alike Locks
- Removable Door(s) and Side Panels
- Pre-installed Casters
- Rear Accessory Channels with Toolless Mounting Slots
- Split Rear Door
- Reversible Front Door
- Removable Enclosure Roof
- Pre-installed Heavy Duty Leveling Feet
- Shipping Brackets Included
- Easy Roof Cable Access
- Rack Row Bolt Hardware Included
- Integrated Grounding Points
- PCI DSS Compliant

PRODUCT CALLOUTS

1. Removable, Reversible, Lockable, and Hexagonal Perforated Front Door
2. Removable and Lockable Side Panels
3. Vented and Removable Roof Panel
4. Removable, Lockable, and Hexagonal Perforated Split Rear Doors
5. Rear Accessory Channels
6. Depth-adjustable Vertical Rack Angles
7. Rack U Numbering
8. Integrated Electrical Grounding
9. Preinstalled Leveling Feet
10. Preinstalled Casters
11. Shipping Brackets
12. Rack Row Bolt Hardware

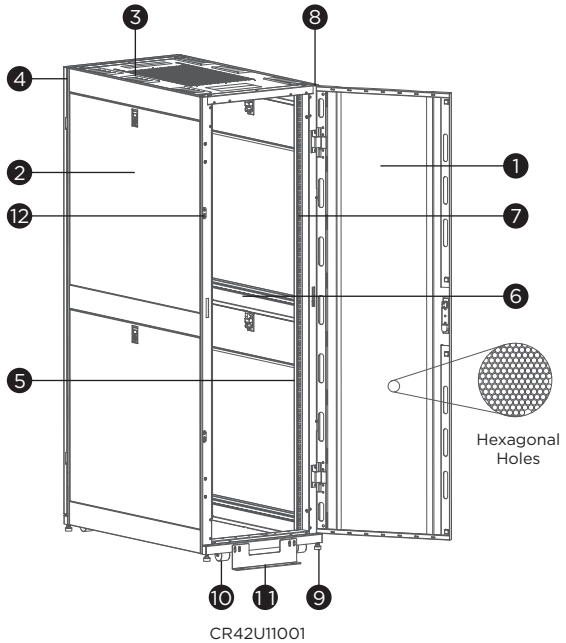

CR42U11001

Copyright © 2024 Cyber Power Systems, Inc. All rights reserved.



TECHNICAL SPECIFICATIONS

Model Name	CR24U11001KD	CR42U11001KD	CR42U11002	CR42U11003	CR42U11004	CR48U11001	CR48U11002
Physical Details							
Rack Height (U)	24	42				48	
Rack Door Type	Perforated Metal Door						
Equipment Mounting Hole Type	Square Mounting Holes						
Weight Capacity - Stationary (kg)	1365						
Weight Capacity - Dynamic (kg)	1020						
Maximum Mounting Depth (cm)	76.8			89.4		76.8	89.4
Dimensions (WxHxD) (in.)	23.6 x 46.9 x 42.1	23.6 x 78.4 x 42.1	29.5 x 78.4 x 42.1	23.6 x 78.4 x 47.2	29.5 x 78.4 x 47.2	23.6 x 88.9 x 42.1	23.6 x 88.9 x 47.2
Dimensions (WxHxD) (cm)	60 x 119.2 x 107	60 x 199.2 x 107	75 x 199.2 x 107	60 x 199.2 x 120	75 x 199.2 x 120	60 x 226 x 107	60 x 226 x 120
Weight (kg)	100	146	163	156	171.5	160	169
Shipping Details							
Package Style	Knock-down		Fully Assembled				
Management							
Leveling Feet	Preinstalled						
Rolling Casters	Preinstalled						
Joining Brackets	Yes						
Removable Roof	Yes						
Removable Door(s) and Side Panels	Yes						
Reversible Front Door	Yes						
Lockable Doors and Side Panels	Yes, Keyed-alike						
Rack U Numbering	Yes						
Ventilation	Perforated Door and Ventilated Roof						
Heat Dissipation	Optional Fan Kit						
Cable Management	Pre-installed Rails with Toolless Mounting Slots						
Cable Access	Roof						
Integrated Grounding	Yes						
Certifications							
Certifications*	CE						
Approvals	DIN41491, DIN41494, EIA/ECA-310-E, IEC 297-2, RoHS						

*Certifications may vary according to different regions. Visit www.cyberpower.com/mx for more information.
#All specifications are subject to change without notice.



CyberPower and the CyberPower logo are trademarks of Cyber Power Systems, Inc., and/or affiliates, which are registered in many countries and regions. All other trademarks are the property of their respective owners.

Copyright © 2024 Cyber Power Systems, Inc. All rights reserved.