CyberPower

# WALL MOUNT ENCLOSURES



CR6U61001/CR6U61002
CR9U61001/CR12U51001

## SPACE-EFFICIENT WALL MOUNT ENCLOSURE

### Space-saving wall mount enclosure with hex perforated design for optimal airflow


Ideal for data center and back office solutions, the standard 19" Wall Mount Enclosure Series is capable of mounting and safeguarding multiple rack equipment, allowing simple management for users. The front door, rear door and side panels are removable with keyed-alike locks. The front door's reversible design allows users to choose the door's direction to open. Furthermore, the front and rear doors are hex-perforated to enable optimal airflow. Optional caster kit allows users to move the enclosure to desired location.

### SERIES FEATURES

- Square and #12-24 Threaded Mounting Holes
- Hexagonal Perforated to Enhance Ventilation Capability
- Doors and Side Panels with Keyed-alike Locks
- Easy Cable Access Top and Bottom
- Removable Door(s) and Side Panels
- Reversible Front Door
- Rack U Numbering
- Flexible Enclosure Configuration
- Integrated Grounding Points
- Optional Caster Kit for Mobility
- Optional Fan Kit for Increasing Ventilation
- PCI DSS Compliant

### PRODUCT CALLOUTS

1. Removable, Reversible, Lockable and Hexagonal Perforated Front Door
2. Removable, Lockable and Hexagonal Perforated Side Panels
3. Swing-out Rear Door
4. Cable Access with Removable Covers
5. Vents for Optional Fan Kit
6. Depth-adjustable Rack Angles with Dual Mounting Holes
7. Rack U Numbering
8. Reserved Holes for Optional Caster Kit

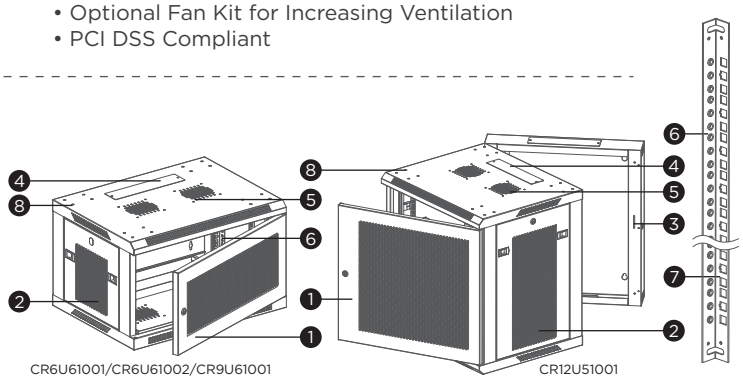


CR6U61001/CR6U61002/CR9U61001 CR12U51001

### TECHNICAL SPECIFICATIONS

| Model Name | CR6U61001 | CR6U61002 | CR9U61001 | CR12U51001 |
|---|---|---|---|---|
| **Physical Details** | | | | |
| Rack Height (U) | 6 | | 9 | 12 |
| Rack Door Type | Perforated Metal Door | | | |
| Wall Mount Rear Frame | - | | | Swing Out |
| Equipment Mounting Hole Type | Dual Mounting Hole (Square and #12-24) | | | |
| Weight Capacity - Stationary (kg) | 60 | | | |
| Maximum Mounting Depth (cm) | 56.2 | 41.2 | 56.2 | 46.2 |
| Dimensions (WxHxD) (cm) | 60 x 37.2 x 60 | 60 x 37.2 x 45 | 60 x 50.5 x 60 | 60 x 63.7 x 60 |
| Weight (kg) | 16.9 | 13.3 | 18.9 | 27.3 |
| **Management** | | | | |
| Invertible Enclosure | Yes | | | |
| Rolling Casters | Optional | | | |
| Removable Door(s) and Side Panels | Yes | | | |
| Reversible Front Door | Yes | | | |
| Lockable Doors and Side Panels | Yes, Keyed-alike | | | |
| Rack U Numbering | Yes | | | |
| Ventilation | Perforated Door and Side Panels with Ventilated Top and Bottom | | | |
| Heat Dissipation | Optional Fan Kit | | | |
| Cable Management | Optional Cable Managers | | | |
| Cable Access | Top and Bottom | | | |
| Integrated Grounding | Yes | | | |
| **Certifications** | | | | |
| Certifications* | CE | | | |
| Approvals | DIN41491, DIN41494, EIA/ECA-310-E, IEC 60297-3-100, RoHS | | | |
| PCI DSS Compliant | Yes | | | |

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.

Copyright © 2024 Cyber Power Systems, Inc. All rights reserved.