

# JVS-N3622-WF


2MP Wi-Fi Vandalproof Dome Camera



## Key Features

- Resolution 1920x1080
- With IR LED and IR-CUT, monitoring day and night
- 2.4Ghz Wi-Fi and 10/100M RJ45 Port
- Supports smartphone remote viewing
- Ingress Protection IP65
- Support 128GB SD Card

## Dimensions(mm)

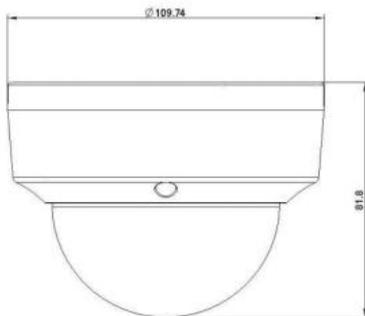

## Specifications

Model	JVS-N3622-WF
<b>Video</b>	
Image Sensor	1/ 2.7" CMOS Sensor
Max Resolution	1920 x 1080
Effective Pixels	2.0MP
Compression Standard	H.264
Framerate	20fps
SNR (dB)	54db
Bitrate	Main: 40~8192Kbps
Illumination	0Lux (IR ON)
<b>Lens</b>	
Lens	4mm
Viewing Angle	H 79.6°, V 47.7°, D: 97.8°
IR-LEDs	15x IR LEDs
IR-Distance	10 Meters
<b>Function</b>	
Privacy Masking	Supports 4 Zone masking
Exposure Mode	Auto
Automatic Gain Control	Auto
White Balance	Auto
Image Enhancement	AGC/ AWB/ AEC/ 3D DNR
Motion Detection	Support
Two-Way Talk	Support
Remote Control	System Management, Audio/Video Management, Image Management, Storage Management, Alarm Management, Network Management.
Light & Sound Alarm	Support
Triggered Events To	Client, Email, Phone
<b>Interface</b>	
Ethernet	Support
SD Card	Support Max. 128GB
Reset Switch	Support
<b>Network</b>	
Ethernet	10M/100M Ethernet, RJ45 Port
Wi-Fi	Wi-Fi (IEEE802.11b/g/n), 2.4Ghz
Stream	Dual stream
Protocols	TCP/IP, ICMP, UDP, SMTP, DHCP, DNS, PPPoE
Network Transmission	CloudSEE P2P Transmission Protocol
<b>General</b>	
Power Supply	DC12V/2A
Consumption	Day ≤3W Night ≤6W
Working Temperature	-20°C~50°C
Humidity	10%~90% Rh
Material	Aluminum & Plastic
Installation	Wall, Ceiling Mounting
Dimensions	109.74x81.8(mm)
Weights	370g