

RG-RAP6260(H)-D

Reyee AX6000 High-density Outdoor Directional Access Point



Highlights

- Ultra-fast 5.95 Gbit/s outdoor Wi-Fi 6, best-in-class Wi-Fi performance
- Easily adding extra outdoor Wi-Fi with Reyee mesh
- Long-distance deployment with optical ports
- IP68 rating, adapting to harsh environments
- Internet access with 2.5 Gbit/s uplink

Highlight Features

Build Ultra-fast Outdoor Wi-Fi 6



WiFi 6
Wi-Fi 6
AX6000



High Density
Access



2.5GE Port
SFP Port



Reyee Mesh
Technology



Free Cloud
Management

Best-in-class Wi-Fi Performance

With a revolutionary combination of OFDMA and 1024QAM, the latest 802.11ax standard, the 160MHz band, and dual band 4x4 MU-MIMO, RG-RAP6260(H)-D wireless aggregation rate reaches 5.95Gbps.

RG-RAP6260(H)-D 5951 Mbps
RG-RAP6260(G) 1775 Mbps



Easily Add Extra Outdoor Wi-Fi with Reyee Mesh

Less wiring, more relaxing



Highlight Features

Support Extra-Distance Access Point Deployment

With **gigabit SFP** port, the device supports up to **20km** transmission from datacenter with single mode fiber



Boost Your Internet Speed with 2.5Gbps Uplink

Build network for future, protect your investments.



Rock-solid in Harsh Environments

Adopts completely sealed, waterproof, dustproof, moisture proof and flame-retardant, wind erosion protection, wide temperature range, and 4kV surge protection design.



Highlight Features

Directional Coverage with Long Range


Built-in high gain antennas, supports full coverage

■ 2.4GHz: 50°H × 30°V

■ 5 GHz: 60°H × 30°V

Cloud, Make Your Business Easy

- Remote monitoring
- Remote Wi-Fi management
- Cloud portal authentication
- Wireless intelligent optimization

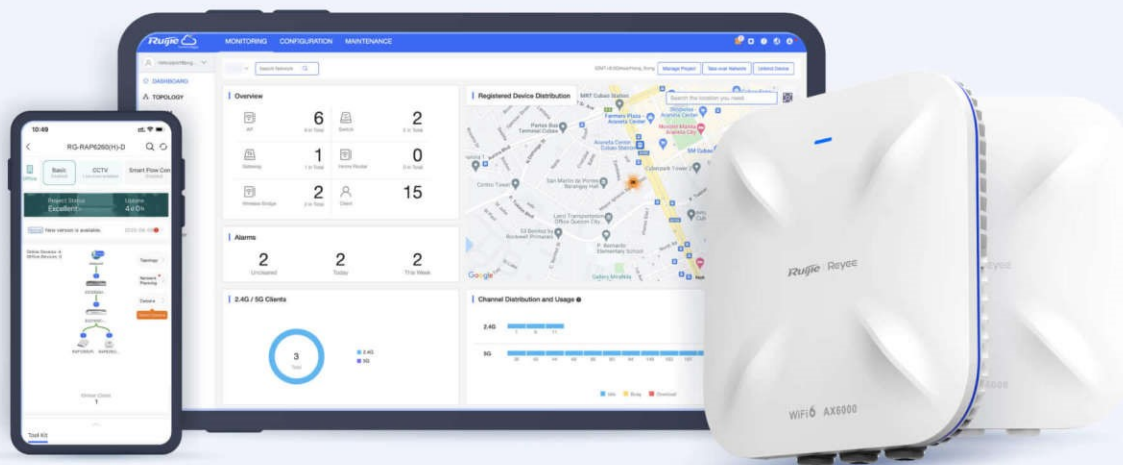

Product Information

Model	RG-RAP6260(H)-D
Product Type	Outdoor AP

Hardware Specifications

Model	RG-RAP6260(H)-D
Antenna	
Antenna	2.4 GHz: 4 built-in directional antennas 5 GHz: 4 built-in directional antennas
Antenna horizontal orientation	2.4 GHz: 50° 5 GHz: 60°
Antenna vertical orientation	2.4 GHz: 30° 5 GHz: 30°
Antenna gain (6 GHz)	No
Antenna gain (5 GHz)	9.00 dBi
Antenna gain (2.4 GHz)	10.00 dBi
Wi-Fi Radio	
6 GHz Wi-Fi	No
5 GHz Wi-Fi	Wi-Fi 4 (IEEE 802.11a/n) Wi-Fi 5 (IEEE 802.11ac) Wi-Fi 6 (IEEE 802.11ax)

Hardware Specifications

Model	RG-RAP6260(H)-D
2.4 GHz Wi-Fi	Wi-Fi 4 (IEEE 802.11b/g/n) Wi-Fi 6 (IEEE 802.11ax)
Operating band	IEEE 802.11b/g/n/ax, 2.400 GHz to 2.4835 GHz IEEE 802.11a/n/ac/ax, 5.150 GHz to 5.350 GHz, 5.470 GHz to 5.725 GHz, 5.725 GHz to 5.850 GHz Note: Available bands vary with countries and regions. To use the preceding frequency bands, ensure that your country or region supports these frequency bands.
Radio design	Dual-radio 8 spatial streams • 2.4 GHz: 4 x 4, MU-MIMO • 5 GHz: 4 x 4, MU-MIMO
FEM	2.4 GHz: 4 x eFEM 5 GHz: 4 x eFEM
6 GHz channel width	No
5 GHz channel width	Auto/20/40/80/160 MHz
2.4 GHz channel width	Auto/20/40 MHz
Maximum wireless data rate	5950 Mbps
6 GHz wireless data rate	No
5 GHz wireless data rate	4803 Mbps
2.4 GHz wireless data rate	1147 Mbps

/ Hardware Specifications

Model	RG-RAP6260(H)-D
Maximum transmit power	Frequency bands and maximum Effective Isotropic Radiated Power (EIRP):
	Note: Country specific restrictions apply.
	European Union & United Kingdom:
	2400–2483.5 MHz, EIRP ≤ 20 dBm
	5470–5725 MHz, EIRP ≤ 30 dBm
	United States:
	2400–2483.5 MHz, max output power ≤ 30 dBm & EIRP ≤ 36 dBm
	5150–5250 MHz, max output power ≤ 30 dBm & EIRP ≤ 36 dBm
	5250–5350 MHz, max output power < 24 dBm & EIRP ≤ 30 dBm
	5470–5725 MHz, max output power < 24 dBm & EIRP ≤ 30 dBm
	5725–5850 MHz, max output power ≤ 30 dBm & EIRP ≤ 36 dBm
	Myanmar:
	2400–2483.5 MHz, EIRP ≤ 23 dBm
	5725–5825 MHz, EIRP ≤ 30 dBm
	Thailand:
	2400–2483.5 MHz, EIRP ≤ 20 dBm

Hardware Specifications

Model	RG-RAP6260(H)-D
	<p>5470–5725 MHz, EIRP ≤ 30 dBm</p> <p>5725–5825 MHz, EIRP ≤ 30 dBm</p> <p>Indonesia:</p> <p>2400–2483.5 MHz, EIRP ≤ 36 dBm</p> <p>5725–5825 MHz, EIRP ≤ 36 dBm</p> <p>Egypt:</p> <p>2400–2483.5 MHz, EIRP ≤ 20 dBm</p> <p>5150–5350 MHz, EIRP ≤ 23 dBm</p> <p>Vietnam:</p> <p>2400–2483.5 MHz, EIRP ≤ 23 dBm</p> <p>5150–5350 MHz, EIRP ≤ 23 dBm</p> <p>5470–5725 MHz, EIRP ≤ 30 dBm</p> <p>5725–5850 MHz, EIRP ≤ 30 dBm</p>
Maximum transmit power (6 GHz)	No
Maximum transmit power (5 GHz)	<p>Combined power: 32 dBm (single-stream power: 26 dBm)</p> <p>Note: The transmit power varies according to regulations in different countries and regions.</p>
Maximum transmit power (2.4 GHz)	<p>Combined power: 32 dBm (single-stream power: 26 dBm)</p> <p>Note: The transmit power varies according to regulations in different countries and regions.</p>

Hardware Specifications

Model	RG-RAP6260(H)-D
Coverage range	<p>5 GHz max: 700 m (2296.59 ft.)</p> <p>2.4 GHz max: 300 m (984.25 ft.)</p> <p>5 GHz recommended: 350 m (1148.29 ft.)</p> <p>2.4 GHz recommended: 75 m (246.06 ft.)</p> <p>Note: The data is obtained in an ideal environment without obstruction. The signal coverage radius depends on client performance and environmental interference.</p>
Modulation	<p>OFDM: BPSK @ 6/9 Mbps, QPSK @ 12/18 Mbps, 16-QAM @ 24 Mbps, 64-QAM @ 48/54 Mbps</p> <p>DSSS: DBPSK @ 1 Mbps, DQPSK @ 2 Mbps, and CCK @ 5.5/11 Mbps</p> <p>MIMO-OFDM: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM and 1024-QAM</p> <p>OFDMA</p>
Receive sensitivity	<p>11b: -91 dBm (1 Mbps), -88 dBm (5.5 Mbps), -85 dBm (11 Mbps)</p> <p>11a/g: -89 dBm (6 Mbps), -80 dBm (24 Mbps), -76 dBm (36 Mbps), -71 dBm (54 Mbps)</p> <p>11n: -83 dBm (MCS0), -65 dBm (MCS7), -83 dBm (MCS8), -65 dBm (MCS15)</p> <p>11ac: 20 MHz: -83 dBm (MCS0), -57 dBm (MCS9)</p>

Hardware Specifications

Model	RG-RAP6260(H)-D
	11ac: 40 MHz: -79 dBm (MCS0), -57 dBm (MCS9) 11ac: 80 MHz: -76 dBm (MCS0), -51 dBm (MCS9) 11ac: 160 MHz: -76 dBm (MCS0), -50 dBm (MCS9) 11ax: 20 MHz: -85 dBm (MCS0), -58 dBm (MCS11) 11ax: 40 MHz: -82 dBm (MCS0), -54 dBm (MCS11) 11ax: 80 MHz: -79 dBm (MCS0), -52 dBm (MCS11) 11ax: 160 MHz: -76 dBm (MCS0), -49 dBm (MCS11)
Dimensions and Weight	
Product dimensions (W x D x H)	300 mm x 300 mm x 75.5 mm (11.81 in. x 11.81 in. x 2.97 in.) (excluding the mounting bracket)
Color	White
Weight	≤ 3.5 kg (7.72 lbs.) (without packaging materials)
Shipping weight	≤ 5.47 kg (12.06 lbs.)
Port Specifications	
Number of 10/100/1000/2500BASE-T ports	1
Number of 1GE SFP ports	1
Reset button	1
LEDs	1 x system status LED
Power Supply and Consumption	
Power supply	<ul style="list-style-type: none">• DC power adapter• PoE+/PoE++

Hardware Specifications

Model	RG-RAP6260(H)-D
	Note: If both the DC power adapter and PoE+/PoE++ are available for power supply, the DC power adapter is preferred.
Local power supply	Yes, one DC power connector (48 V, 1 A)
Dimensions of the DC connector	Outer diameter: 5.5 mm (0.22 in.) Inner diameter: 2.1 mm (0.08 in.) Depth: 10 mm (0.39 in.)
PoE In standard	<ul style="list-style-type: none">• IEEE 802.3at (PoE+) Note: Radio transmission and reception is limited to 2T2R at 2.4 GHz and 5 GHz. <ul style="list-style-type: none">• IEEE 802.3bt (PoE++)
PoE budget	No
Maximum power consumption	40 W
Environment and Reliability	
Operating temperature	−40°C to +65°C (−40°F to +149°F)
Storage temperature	−40°C to +85°C (−40°F to +185°F)
Operating humidity	0% RH to 100% RH (non-condensing)
Storage humidity	0% RH to 100% RH (non-condensing)
Mounting options	Wall/Pole
IP rating	IP68
Surge protection	Ethernet port: ±4 kV for common mode
MTBF	400,000 hours

Hardware Specifications

Model	RG-RAP6260(H)-D
Certification and Regulatory Compliance	
RoHS	Yes
Safety compliance	EN 62368-1
EMC	EN 55032
	EN 55035
	EN 61000-3-3
	EN 61000-3-2
	EN 301489-1
	EN 301489-3
RF	EN 301489-17
	EN 300 328
	EN 301 893
Certification	EN 300 440
	CE, FCC, CB, ISED, cTUVus
System Specifications	
Flash memory	256 MB
RAM	512 MB DDR3

Software Specifications

Model	RG-RAP6260(H)-D
WLAN	
Maximum number of associated wireless clients	64 (2.4 GHz) 512 (5 GHz) 512 (2.4 GHz and 5 GHz enabled)
Recommended number of associated wireless clients	<ul style="list-style-type: none">● Support for IEEE 802.11ax and 160 MHz: 16 (2.4 GHz) 114 (5 GHz) 130 (2.4 GHz and 5 GHz enabled)● Support for IEEE 802.11ax and 80 MHz: 16 (2.4 GHz) 84 (5 GHz) 100 (2.4 GHz and 5 GHz enabled)● Support for IEEE 802.11ac: 16 (2.4 GHz) 64 (5 GHz) 80 (2.4 GHz and 5 GHz enabled)
Maximum number of SSIDs	8
Radio-based client limiting	Yes
Layer 2 isolation	Yes
OFDMA	Yes
WMM	Yes

Software Specifications

Model	RG-RAP6260(H)-D
DFS	Yes
MLO	No
4K-QAM	No
Different SSIDs for the same VLAN	Yes
Enabling/Disabling MLO	No
AP load balancing	Yes
Beamforming	Yes
802.11k/v roaming	Yes
Fast transition (802.11r)	Yes
Layer 2 roaming	Yes
Layer 3 roaming	Yes
AI roaming	Yes
Co-channel roaming	Yes
Roaming sniffing	No
Configurable antenna	No
PSK authentication	Yes
Static allowlist	Yes
Adjusting the transmit power for beacon and probe frames	Yes
Encryption mode (WPA-PSK, WPA2-PSK, WPA/WPA2-PSK)	Yes

Software Specifications

Model	RG-RAP6260(H)-D
OWE (Enhanced Open)	
WPA3-SAE	Yes
WPA2-PSK/WPA3-SAE	
Number of blocklists and allowlists based on MAC addresses (single SSID)	256
Number of global blocklists/allowlists	256
Mesh management	Yes
AP Mesh	Yes
AP portal authentication	Yes
Maximum number of devices that can be managed	300
One-Click Network Optimization	Yes
Static blocklist	Yes
Interface	
IPTV transparent transmission	Yes
IP Service	
ARP binding	Yes
IPv4 ping	Yes
IPv6 ping	Yes

Software Specifications

Model	RG-RAP6260(H)-D
Traceroute	Yes
Static/Dynamic NAT	Yes
DHCP server	Yes
IPv6	Yes
Network Management and Monitoring	
Wireless repeater mode	Yes
Web login information	Single-device login address: 10.44.77.254 Network-wide login address: 10.44.77.253 Default password: admin
Network-wide configuration and management	Yes
Ruijie Reyee App management	Yes
eWeb management	Yes
Ruijie Cloud management	Yes
SNMP	Yes
Configuration synchronization among the app, eWeb, and Ruijie Cloud	Yes
Displaying device information on Ruijie Cloud	Yes
Multicast	

Software Specifications

Model	RG-RAP6260(H)-D
IGMP snooping (wireless-to-wireless)	Yes
IGMP snooping (wired-to-wireless)	Yes
IGMP snooping (wired-to-wired)	No
Ethernet Switching	
IEEE 802.1Q VLAN	Yes
VLAN expansion	Yes
Enabling/Disabling an interface	Yes
Interface rate	ETH:10/100/1000/2500 Mbps auto-negotiation
Interface mode (half-duplex/full-duplex switching)	Yes
Authentication	
802.1X authentication	Yes
Dynamic VLAN assignment	Yes
IPv4 Ruijie RG-OCE Identity Manager authentication scheme	Yes
Linkufi authentication	Yes
Ethernet Interface	
PPPoE clients	Yes
Basic Configurations	
AP mode	Yes
Routing mode	Yes

Software Specifications

Model	RG-RAP6260(H)-D
Internet access mode	<div>Static IP address</div> <div>Static IPv6 address</div> <div>Dynamic IP address</div> <div>Dynamic IPv6 address</div> <div>PPPoE</div>

Package Contents

Model	RG-RAP6260(H)-D
Package Contents	
Package Contents	1 x AP
	2 x Hose clamps
	1 x Mounting bracket
	1 x Mounting arm
	4 x Internal/External hex machine screws (M8 x 20 mm)
	4 x Expansion anchors (M8 x 60 mm)
	1 x Cable gland for an SFP port
	1 x Cable gland for an Ethernet port (pre-installed)
	1 x SFP port plug (pre-installed)
	1 x DC connector plug (pre-installed)
	1 x Cable gland for a DC connector
	1 x Grounding cable
	1 x User Manual
	1 x Warranty Card
Accessories	
Power adapter	No

Ruijie | ReYee

 **R**edefine **y**our **e**asy network



Ruijie Networks Co., Ltd.

Official Website: <https://Reyee.Ruijie.com>